

Stable Door Solutions

Multi-point locking solutions designed for contemporary and traditional Composite and Timber Stable Doors



2 Introduction Stable Door Solutions

Winkhaus Stable Door Solutions

Introducing two locking solutions suitable for Composite and Timber Stable Doors. Designed and produced at our state-of-the-art Meiningen production facility, with a range of faceplates and backsets for every eventuality.



Stable Door Solutions Introduction

Two solutions for every eventuality

Winkhaus offers a choice of two Stable Door Locking Solutions to give our customers the ultimate flexibility in design for Composite and Timber doors.

Inspired by the popular Cobra Multi-Point Locking Solution, both of our Stable Door locks are tested to 100,000 cycles in Winkhaus' inhouse laboratory, and feature a sprung gearbox which offers incredible performance, aiding in the prevention of handle 'droop'. Both solutions provide security and ease of operation, with solid steel anti-push back hooks to provide added protection against forced entry.

Interlocking Stable Door

Winkhaus' latest innovation, the Interlocking Stable Door Locking Solution, featuring separate deadbolts and hooks for both the upper and lower parts of the Stable Door. The stand out features the integrated shootbolt, which removes the need for additional hardware to connect the two halves of the Stable Door, improving aesthetic and simplifying the fabrication process. Removal of the additional hardware also allows greater flexibility for positioning of a drip bar and potential close proximity between the additional hardware and the handle.

Standard Stable Door

Winkhaus Stable Door locking solutions include an adjustable roller ball latch that aids in installation and provides convenient adjustment for endusers throughout the lifespan of the Stable Door. Range options include round end, square end and U-rail faceplates, with back sets available in three sizes from 35mm to 55mm.

Interlocking Stable Door

All important aspects at a glance

Enhanced security

From four locking points with separate hook and deadbolt for each part of the door.

Interlocking shootbolt

Removes the need for additional hardware, improving the aesthetics of the door design increasing manufacturing productivity and simplifying operation.

Higher handle height

That does not impact on positioning of door drip bar detail for inward opening doors.

High performance gearbox

Tested to 100,000 cycles, the sprung gearbox offers the lowest possible operating forces and helps prevent handle 'droop'.

20mm face plate

For widest compatibility with door hardware.

Faceplate	Backset
20mm Square End	35mm
20mm Square End	45mm
20mm Square End	55mm

Standard Stable Door Solutions Stable Door Solutions

Standard Stable Door

All important aspects at a glance

Multiple features and characteristics

Many of the features and performance characteristics of the popular Winkhaus Cobra multi-point locking system have been used in the development of the Stable Door Lock for Composite and Timber doors.

25mm throw steel hooks

The Stable Door lock houses 25mm throw tapered plated steel hooks for the ultimate security, ease of operation and weather performance.

High performance gearbox

Tested to 100,000 cycles, the sprung gearbox offers the lowest possible operating forces and helps prevent handle 'droop'.

20mm face plate

For widest compatibility with door hardware.

Faceplate	Backset
20mm Round End	35mm
20mm Round End	45mm
20mm Round End	55mm



Stable Door Solutions Nano Protect


Nano Protect

Beyond the elements

The British weather is famed for its variability, so it's important to choose a door and window locking solution that is up to the task.

Winkhaus locking solutions have been tested to EN 1670 corrosion protection class 5, the highest level available, which requires emersion in a salt water mist for 480 hours. Once the testing requirement was reached, testing continued with our Nano Protect coating achieving a 66% overrun above the class 5 requirement.

Precisely what you would expect as the standard coating on every Winkhaus door and window solution.

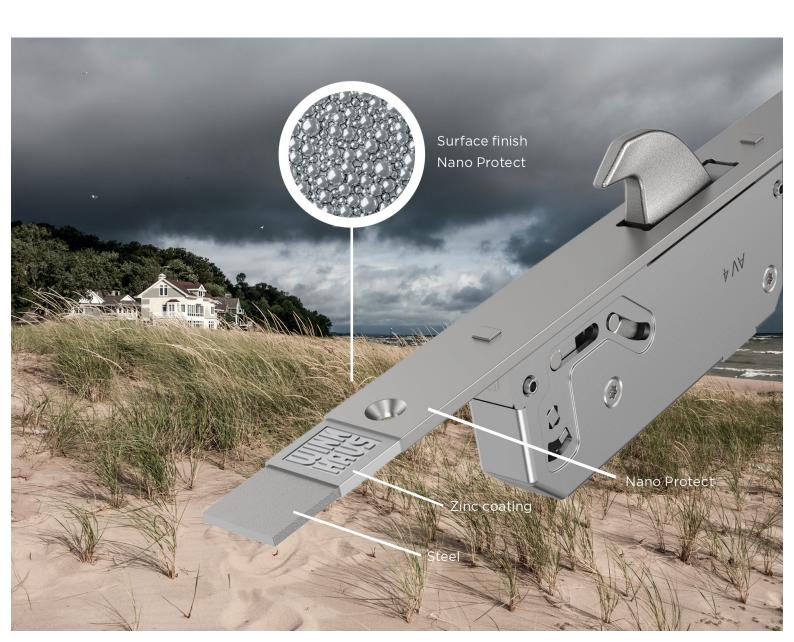

Winkhaus UK Ltd

2950 Kettering Parkway, Kettering, Northants NN15 6XZ Tel: +44 (0)1536 316000

www.winkhaus.co.uk email: enquiries@winkhaus.co.uk